

F-200

Activated alumina for liquid and gas drying

Product Information

Engelhard F-200 is a smooth sphere of activated alumina produced by Engelhard's unique manufacturing process. F-200 is an excellent desiccant for drying a wide variety of liquids and gases. Although all molecules are adsorbed to some extent on F-200, those molecules having the highest polarity are preferentially adsorbed. Stream conditions such as pressure, concentration and molecular weight of the molecules, temperature and site competing molecules affect the efficiency of adsorption. F-200 is available in nominal sizes of 1/16", 1/8", 3/16", and 1/4" spheres.

Product benefits

1. Uniform ball size. This property is especially useful in high pressure gas dehydration where minimizing pressure drop is important. The uniform size and sphericity of Engelhard F-200 prevents adsorbent segregation during pneumatic loading, thus minimizing channeling and yielding more efficient use of the entire desiccant tower.

2. High crush strength. Engelhard F-200 has high crush strength which allows rapid pneumatic loading of towers. The high crush strength also allows use of taller towers that make more efficient use of the desiccant. F-200 activated alumina is highly resistant to amine attack. Furthermore, F-200's high crush strength enables it to

dehydrate acid containing gases and liquids, such as CO₂, for a longer operating life.

3. Low abrasion. The low abrasion of F-200 ensures less dusting during transport, loading, and service life which reduces pressure drop and minimizes downstream valve and filter plugging, common with dustier products.

4. High adsorptive capacity. F-200's high surface area and tailored pore distribution provide a high dynamic H₂O adsorption capacity. With proper tower design and effective regeneration, F-200 can achieve an ultra low H₂O effluent specification (i.e. dew point). F-200 also has excellent cyclic stability that yields a long life.

Product applications

1. Drying. Nearly all gases and liquids can be dried with F-200. Water removal is often necessary for efficient processing, storage, and transportation of fluids.

The 3/16" size is normally recommended for vapor phase dehydration applications where pressure drop minimization yet high H₂O adsorption capacity as do smaller diameter sizes of F-200.

The 1/8" and 7 x 14 Tyler mesh size are recommended for use in liquid dehydration and other mass transfer limited adsorption applications.

F-200 is rapidly becoming the industry standard for drying compressed air. Providing long service life with performance at or below dew point specifications, F-200 is a "peace of mind" product for both large and small dryers. F-200 is appropriate for use in dehydrating gases in both normally regenerative (350 to 600°F) and pressure swing (PSA) modes.

2. Acid removal. Transformer oils, lubricating oils, and refrigerants form degradation acids upon use. F-200 will remove these acids during use. In the manufacture of chlorinated and/or fluorinated hydrocarbons, removal of these residual halides and water is essential for a noncorrosive product.

3. Process stream purification. F-200 is excellent for removal of highly polar compounds such as TBC, alcohols, ethers, etc. It also readily adsorbs heavy metal ions from hydrocarbons.

4. Hydrocarbon adsorption. Under proper operating conditions, the pore size distributions and surface chemistry of activated aluminas are conducive to the adsorption of hydrocarbons.

Available packaging


- 50 lb bags
- 2000 lb super sacks

Engelhard seeks to present reliable information concerning the composition, properties and use of its products, services and processes. However, all literature, advice and other material concerning any product, service or process or its selection or use is provided AT NO CHARGE AND WITH NO WARRANTY OF ANY KIND. All sales are subject to Engelhard's Terms and Conditions of Sale, which are reproduced on the reverse side of each invoice. ALL WARRANTIES OF MERCHANTABILITY AND FITNESS OF PURPOSE ARE DISCLAIMED. Remedies for any breach and Engelhard's liability, including that for patent infringement, are limited as provided in Engelhard's Terms and Conditions of Sale. Engelhard is not liable for consequential, incidental, or special damages. Nothing should be construed as a recommendation or inducement to infringe any patent. No assumption should be made that all safety or environmental protection measures are indicated, or that other measures may not be required. Engelhard and the Engelhard logo are trademarks of Engelhard Corporation. All trademarks identified by ™ or ® are trademarks or registered trademarks, respectively, of Engelhard Corporation. Fortune 500 is a registered trademark of Time Inc. All other trademarks are the property of their respective owners.

About Engelhard

Engelhard is a surface and materials science company that develops technologies to improve customers' products and processes. A Fortune® 500 company, Engelhard is a world-leading provider of technologies for environmental process, appearance and performance applications.

For more information about Engelhard F-200 activated alumina, simply call us at 318-336-9601, or visit us at www.engelhard.com.

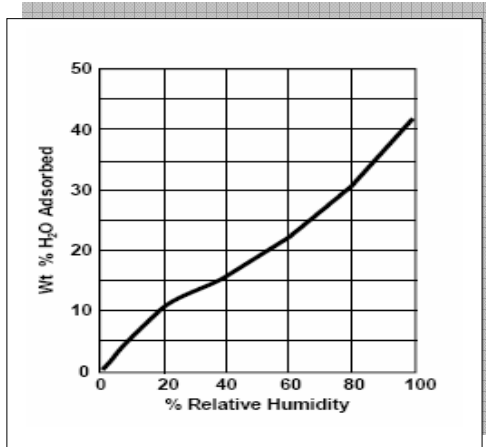

Chemical Composition (wt %)				
Al ₂ O ₃	92.7			
SiO ₂	0.02			
Fe ₂ O ₃	0.02			
Na ₂ O	0.30			
LOI (250-1100°C)	7.0			
Physical Properties	½" (12.7mm)	3/8" (9.5mm)	¼" (6.4mm)	1/8" (3.2mm)
Surface area, m ² /g	360	350	340	320
Total pore volume, cc/g	0.5	0.5	0.5	0.5
Packed bulk density, lbs/f ³ (kg/m ³)	48(769)	48 (769)	48 (769)	48 (769)
Crush strength, lbs (kg)	11 (5)	30 (14)	55 (25)	70 (32)
Abrasion loss, wt %	.15	.10	.10	.10

All data represent typical product properties and are based upon Engelhard standard test methods. All test methods are available upon request. Information presented herein is believed to be accurate and reliable but does not imply any guarantee or warranty by Engelhard.

ENGELHARD

Change the nature of things.

Customer Service – North America

Toll-free: 800-533-4511
 Telephone: 318-336-9601
 Fax: 318-336-9922

Customer Service – Outside North America

Telephone: +49 69 957341 0
 Fax: +49 69 957341 13

Engelhard Corporation

101 Wood Avenue
 Iselin, NJ 08830-0770
 Web site: www.engelhard.com